


General Lifting Gear

6130 - Chain block

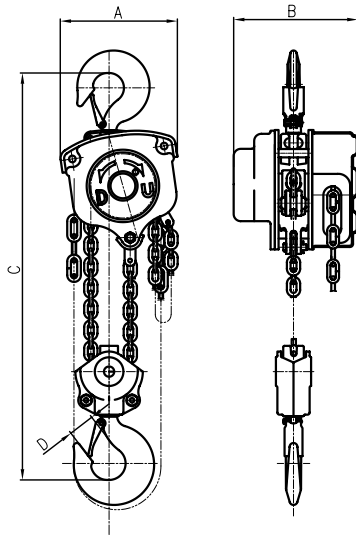

Description:

- Compact design & light weight for ease of use
- Heat treated body, shafts & gears for enhanced strength
- Forged lifting and suspension hooks, with safety latches
- CE, Serial number, SWL & H.O.L shown on label and carton

Standard: EN 13157

Material: Forged alloy steel

Factor of safety: 4 to 1

Construction: Quenched & tempered

Proof load: Individually proof tested to 1.5 time of working load limit

Finish: Powder coated

Chain block

| Part No. | Rated load (T) | Standard lift (M) | Test load (T) | Effort required at capacity (N) | Load chain diameter (mm) | No. of load chains | A (mm) | B (mm) | C (mm) | Net weight (Kg) | Extra weight per meter of extra lift (Kg) |
|-----------|----------------|-------------------|---------------|---------------------------------|--------------------------|--------------------|--------|--------|--------|-----------------|---|
| 6130.0005 | 0.5 | 3 | 0.75 | 262 | 5.00 | 1 | 127 | 115 | 288 | 7 | 1.5 |
| 6130.0010 | 1 | 3 | 1.5 | 324 | 6.00 | 1 | 156 | 131 | 334 | 10.5 | 1.8 |
| 6130.0015 | 1.5 | 3 | 2.25 | 395 | 7.10 | 1 | 180 | 142 | 415 | 15.5 | 2 |
| 6130.0020 | 2 | 3 | 3 | 330 | 6 | 2 | 156 | 131 | 459 | 16 | 2 |
| 6130.0030 | 3 | 3 | 4.5 | 402 | 7.1 | 2 | 180 | 142 | 536 | 23 | 3.2 |
| 6130.0050 | 5 | 3 | 7.5 | 430 | 10 | 2 | 230 | 171 | 660 | 39 | 5.3 |
| 6130.0100 | 10 | 3 | 12.5 | 438 | 10 | 4 | 410 | 171 | 738 | 69 | 9.8 |
| 6130.0200 | 20 | 3 | 25 | 438 | 10 | 8 | 645 | 215 | 1002 | 156 | 19.6 |
| 6130.0300 | 30 | 3 | 37.5 | 442 | 10 | 10 | 710 | 398 | 1050 | 237 | 23.9 |