


Chain Slings and Fittings

8000 - Grade 80 - Alloy Steel Chain

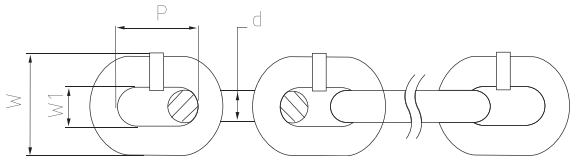

Description:

- Suitable for overhead lifting application
- For use with Grade 80 components
- High tensile steel
- Grade 80 & GPT embossed

Standard:	EN 818
Material:	Alloy steel
Factor of safety:	4 to 1
Construction:	Quenched & tempered
Proof load:	2.5 times of working load limit
Finish:	Self coloured

Grade 80 Alloy Steel Chain

Part No.	Chain dia (mm) d	WLL (Ton)	Test load (kN)	Inside length (mm) P	Outside width (mm) W	Inside width (mm) W1	Weight (Kg/M)
8000.0007	7	1.50	37.00	21	25.9	9.10	1.07
8000.0008	8	2.00	48.00	24	29.6	10.40	1.38
8000.0010	10	3.15	76.00	30	37	13.00	2.20
8000.0013	13	5.3	128	39	48.1	16.9	3.8
8000.0016	16	8	192	48	59.2	20.8	5.63
8000.0020	20	12.5	300	60	74	26	8.6
8000.0022	22	15.0	366	66	81.4	28.6	10.2
8000.0026	26	21.2	510	78	96.2	33.8	14.87
8000.0032	32	31.5	772	96	118	41.6	22.29