


Chain Slings and Fittings

About Chain Fittings

Chain fittings robust and reliable, giving a powerful performance. All are made from forged alloy steel. Quenched, tempered and fatigue rated to greatly increase resistance to wear and abrasion.

Clevis Hooks are manufactured to allow simple assembly and disassembly without requiring special tools. They are also suitable for Grade 80 chains.

8010 - Connecting Link

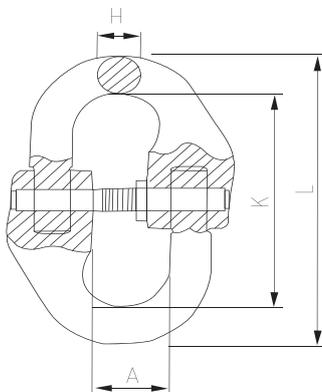

Description:

- Designed for use with grade 80 alloy steel chain
- Used for connecting alloy steel chain to components
- Size, CE, WLL, Traceability code & GPT embossed

Standard:	EN 1677
Material:	Forged alloy steel
Factor of safety:	4 to 1
Construction:	Quenched & tempered
Proof load:	2 times of working load limit
Finish:	Powder coated

Connecting Link						
Part No.	WLL (T)	A (mm)	L (mm)	K (mm)	H (mm)	Weight (Kg)
8010.0078	2	18.00	79.50	62.50	8.5	0.15
8010.0010	3.15	25.00	93.00	68.00	10.8	0.30
8010.0013	5.3	29.00	117.00	87.00	15	0.70
8010.0016	8	34.50	148.00	108.40	19.8	1.10
8010.0020	12.5	41.00	169.50	121.50	24	1.90
8010.0022	15	48.00	193.50	141.50	26	3.20
8010.0026	21.2	57.5	220	158.00	30	4.50